


## FULL-SURFACE



- Hinges are applied to the exposed surface of the door and frame, no mounting required
- For doors up to 2 1/4" (57mm) thick
- Ideal for heavy doors-up to 450 lbs (204kg)
- Non-handed
- UL listed up to 3 hrs for doors using steel stud
- Aluminum reinforced at stress points
- Extruded 6063-T6 aluminum alloy with polyacetal thrust bearings

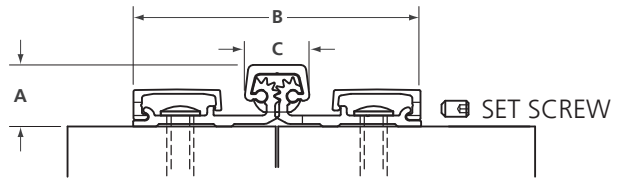

MODEL NUMBER	LENGTH	DESCRIPTION	FINISH	DOOR WEIGHT LBS (KG)	A	B	C	PER BOX	WEIGHT LBS /KG
A571HD 083	83 (2108.2)	Heavy duty	C, D	450 (204)	23/32 (18.3)	3 13/32 (86.5)	25/32 (19.8)	1	10 / 4.5

ORDERING EXAMPLE: **A571HD** | **C** | **083**  
SERIES FINISH LENGTH