


PARAMOUNT

G1B SERIES HEAVY-DUTY COMMERCIAL LOCKSETS

- Non-handed
- Standard backset 2 3/4" (70mm)
- Standard solid brass 6-pin tumbler cylinder Schlage "C" keyway
- Concealed mounting plate and screws
- For 1 9/16" (40mm) to 2" (51mm) door thickness
- Stainless steel 1/2" (13mm) deadlatch bolt throw
- Standard 1 1/8" (29mm) x 2 1/4" (57mm) faceplate
- Standard 1 1/4" (32mm) x 4 7/8" (124mm) strike
- Available in a variety of standard functions
- Easy installation for new construction or retrofit
- Fits ANSI A115.2, 161 door prep
- Conforms to ANSI A156.2, Grade 1
- 3 hour UL fire rating
- 5 year mechanical limited warranty

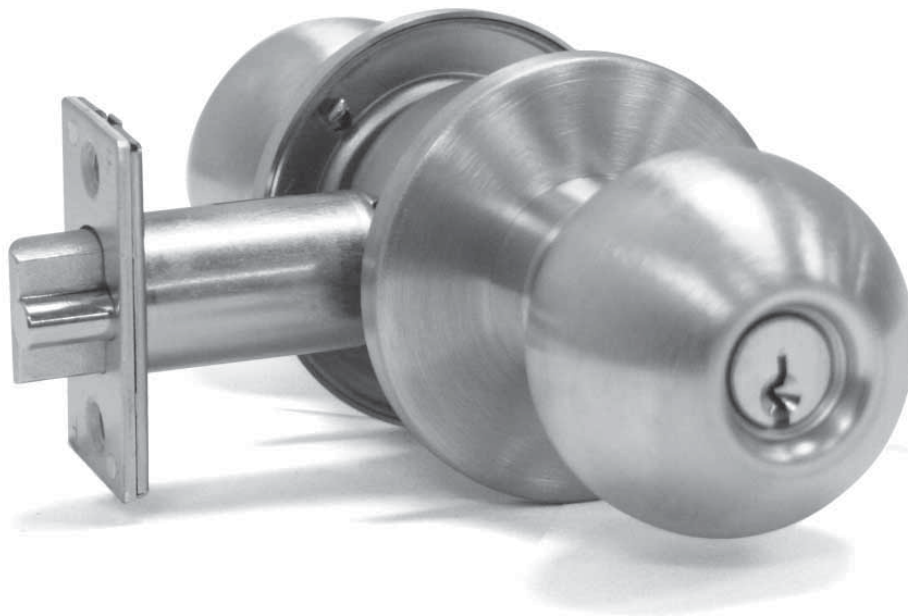

SFIC model
available

CONFORMS TO ANSI
GRADE 1




G1B series heavy-duty locksets are recommended by door hardware specialists for high traffic commercial doors. The G1B locksets are recognized for value while delivering lasting performance and security.

G1B SERIES LOCKSETS

SPECIFICATION

All bored knob locksets shall be G1B series. Locks shall meet the requirements of ANSI A156.2, Grade 1. G1B series ball locksets shall be adjustable for 1 9/16" (40mm) to 2" (51mm) door thickness. Locks shall fit standard 2 1/8" (55mm) cross bore (161 door prep). Latch bolt shall have standard 2 3/4" (70mm) backset, with 1/2" (13mm) latch throw and all locks shall be of heavy-duty construction and shall have a 3 hour UL listing for use on fire doors. Locks shall be non-handed and supplied with all necessary mounting fasteners.

SIZE CHART & SELECTION GUIDE

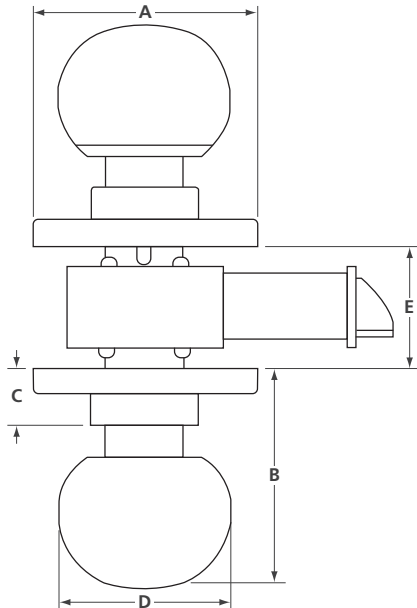						MODEL NUMBER	FUNCTION	FINISH	QTY PER CASE	WEIGHT LBS / KG
						G1B 10	Passage	26D	10	33.0 / 15.0
						G1B 40	Privacy			33.0 / 15.0
						G1B 53	Entrance			34.5 / 15.7
						G1B 53 IC	Entrance IC, less core			61.6 / 28.0
						G1B 60*	Store			34.5 / 15.7
						G1B 60 IC	Store IC, less core			61.6 / 28.0
						G1B 70	Classroom			33.0 / 15.0
						G1B 70 IC	Classroom IC, less core			61.6 / 28.0
						G1B 80	Storeroom			33.0 / 15.0
						G1B 80 IC	Storeroom IC, less core			61.6 / 28.0
						G1B 82	Institution	33.0 / 15.0		
SERIES	A DIA	B*	C	D DIA	E					
G1B	2 3/4 (68)	2 15/16 (75)	3/4 (19)	2 3/16 (55)	1 9/16 to 2 (40 to 52)					

* Dimension applicable for 1 3/4" (44mm) door thickness

ORDERING EXAMPLE:

G1B	10	-26D
SERIES	FUNCTION	FINISH

PARTS & ACCESSORIES

STRIKE-T	T-type strike, 1 1/8" (29mm) x 2 3/4" (70mm)
ASA-T	ASA strike with adjustable tab
G1DL234	2 3/4" (70mm) backset entry deadlatch
G1SL234	2 3/4" (70mm) backset passage spring latch

STRIKE-T



ASA-T



DEADLATCH



SPRING LATCH

