

PARAMOUNT

G3B SERIES CYLINDRICAL LOCKSETS

- Non-handed
 - Standard backset 2 3/8" (60mm); adjustable to 2 3/4" (70mm)
 - Standard solid brass 5-pin tumbler cylinder Schlage "C" keyway
 - Concealed mounting plate and screws
 - For 1 3/8" (35mm) to 1 3/4" (45mm) door thickness
 - Stainless steel 1/2" (13mm) deadlatch bolt throw
 - Standard 1" (25.4mm) x 2 1/4" (57mm) faceplate
 - Standard 1 1/8" (29mm) x 2 3/4" (70mm) strike
 - Available in a variety of standard functions
 - Easy installation for new construction or retrofit
 - Conforms to ANSI A156.2 series 4000, Grade 3
 - 1 year mechanical limited warranty
-



CONFORMS TO ANSI
GRADE 3

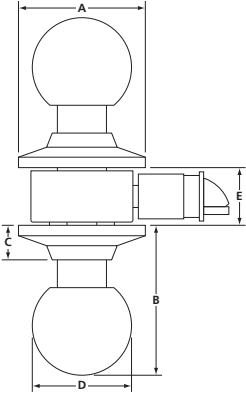
G3B series cylindrical residential locksets are recommended by door hardware specialists for use in multi-unit housing.

G3B SERIES LOCKSETS

SPECIFICATION

All bored knob locksets shall be G3B series. Locks shall meet the requirements of ANSI A156.2, Grade 3. G3B series ball locksets shall be adjustable for 1 3/8" (35mm) to 1 3/4" (45mm) door thickness. Locks shall fit standard 2 1/8" (55mm) cross bore (161 door prep). Latch bolt shall have standard 2 3/8" (60mm) backset, adjustable to 2 3/4" (70mm), with 7/16" (11mm) latch throw. Locks shall be non-handed and supplied with all necessary mounting fasteners. **KEYING:** The G3B Grade 3 cylindrical locks are available in a standard Schlage "C" keyway.

SIZE CHART & SELECTION GUIDE

						MODEL NUMBER	FUNCTION	FINISH	PER CASE	WEIGHT LBS / KG
						G3B 10	Passage	3, 32D	20	22.0 / 10.0
						G3B 40	Privacy			22.0 / 10.0
						G3B 53	Entrance			28 / 12.6
						G3B 80	Storeroom			28 / 12.6
SERIES	A DIA	B*	C	D DIA	E					
G3B	2 1/2 (64)	2 1/2 to 2 3/4 (64 to 68)	11/16 (17.5)	2 (51)	1 3/8 to 1 3/4 (35 to 45)					

* Dimension depends on door thickness

ORDERING EXAMPLE: G3B | 10 | -32D
SERIES FUNCTION FINISH