



- Type** • Cylindrical lock
- Certifications**
 - Conforms to ANSI/BHMA A156.2
 - UL listed, 3hr fire-rating
 - UL 10C Positive Pressure Rating
 - 10 Year limited warranty
- Door Thickness**
 - 1 $\frac{3}{8}$ –2" (35–51 mm)
 - SFIC models: 1 $\frac{9}{16}$ –2" (40–51 mm)
- Handing** • Non handed
- Backset**
 - 2 $\frac{3}{4}$ " (70 mm)
 - 2 $\frac{3}{8}$ " (60 mm) – available
 - 3 $\frac{3}{4}$ " (95 mm) – available
 - 5" (127 mm) – available
- Spring Latch**
 - Stainless steel, $\frac{1}{2}$ " (12.7 mm) throw
 - Deadlatch, $\frac{3}{4}$ " (19 mm) throw – available
- Faceplate**
 - Mortise type, square corners
 - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (28.5x57 mm)
- Strike** • ASA Strike
- Trim**
 - Stainless steel knob
 - Stainless steel rose
 - Rose diameter: 2 $\frac{15}{16}$ " (74.6 mm)
- Chassis**
 - Concealed mounting plate and screws
 - Removable security posts

- Preparation**
 - Cross bore: 2 $\frac{1}{8}$ " (54 mm)
 - Edge bore: 1" (25.4 mm)
- Cylinder**
 - Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable
 - Small format interchangeable core (SFIC) model – available*

Other keyways and keying options available, including CX5 high security. () BEST® and CX5® cores sold separately.*

Functions	10 Passage	70 Classroom
	42 Privacy	80 Storeroom
	53 Entry	

Finish 32D–Stainless steel


Other finishes available by special order

GX1B	53	-	32D
SERIES	FUNCTION		FINISH

SELECTION GUIDE

SERIES	FUNCTION	FINISH ¹	/CASE
GX1 B	10 Passage	32D	6
GX1 B	42 Privacy	32D	6
GX1 B	53 Entry ↔	32D	6
GX1 B	53IC Entry SFIC, less core ↔	32D	6
GX1 B	70 Classroom ↔	32D	6
GX1 B	70IC Classroom SFIC, less core ↔	32D	6
GX1 B	80 Storeroom ↔	32D	6
GX1 B	80IC Storeroom SFIC, less core ↔	32D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED
 ↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

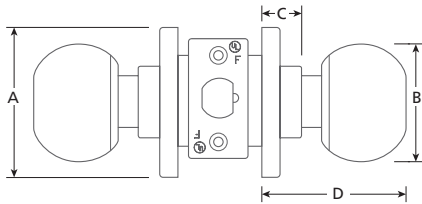

	A	B	C	D*
GX1 B	2 ¹⁵ / ₁₆ (74.6)	2 ¹ / ₄ (57)	1 ³ / ₁₆ (21)	2 ⁵ / ₈ -3 (67-76)
IN (MM)	(*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.			

PARTS & ACCESSORIES



9106
T-Strike, square corners:
1¹/₈x2³/₄" (28.5x70 mm)



9106NH
T-Strike, no hole; square corners:
1¹/₈x2³/₄" (28.5x70 mm)



9806
CX5 high security SFIC core, 6 pin, 0 bitted

9807
CX5 high security SFIC core, 7 pin, 0 bitted

CX5-TPICB
Tailpiece for use with CX5 SFIC cores

CBI-BF6KD-26D
BEST® F type SFIC core, 6 pin, 0 bitted

CBI-BF7KD-26D
BEST® F type SFIC core, 7 pin, 0 bitted



GX1SL238
Passage latch: 2³/₈" (60 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate



GX1SL234
Passage latch: 2³/₄" (70 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate



GX1PL238
Privacy latch: 2³/₈" (60 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate



GX1PL234
Privacy latch: 2³/₄" (70 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1DL238
Deadlatch: 2³/₈" (60) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1DL234
Deadlatch: 2³/₄" (70 mm) backset
1¹/₈x2¹/₄" (28.5x57 mm) faceplate

GX1DL234-34
Deadlatch: 2³/₄" (70 mm) backset,
3/4" (19 mm) throw, 1¹/₈x2¹/₄" (28.5x57 mm)
faceplate



GX1LE334
Backset extension to 3³/₄" (95 mm); use with
2³/₈" (60 mm) backset latch

GX1LE500
Backset extension to 5" (127 mm); use with
2³/₄" (70 mm) backset latch